

RICOMAN

Thanos LED Multibay

INSTALLATION INSTRUCTIONS



PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION AND LEAVE
A COPY WITH THE END USER FOR FUTURE REFERENCE.

SAFETY INFORMATION – We recommend that luminaires be installed by a fully qualified and competent electrician who understands building regulations and the current IEE wiring regulations. The light source contained in this luminaire shall only be replaced by the manufacturer or a qualified professional.

Before commencing any installation or maintenance work, ensure that the electricity is switched off at the mains.



IMPORTANT USER INFORMATION

Please install and use strictly in accordance with these instructions. Make sure that you have all the tools and equipment to complete the installation safely and correctly. Improper installation could cause harm to your property and/or person and void your warranty.

It is the installer's responsibility to consider fire & safety risk and take appropriate precautions.

This product is a CLASS 1 Fitting and must be connected to an earth termination.

PRE INSTALLATION INSTRUCTIONS & GUIDELINES

Turn power off before inspection, installation or removing the light and properly ground the electrical enclosure.

Use only UL or IEC approved wire for input/output connections.

The luminaire must be installed on to a ceiling which should be firm enough to hold the weight of more than five times of the fitting itself.

LED Chips can be susceptible to damage by gases, vapours, etc emitted by other materials, especially rubber, causing a severe reduction in light output.

Ensure there is adequate space for ventilation around the fitting.

Ensure that all electrical connections are tight with no loose strands.

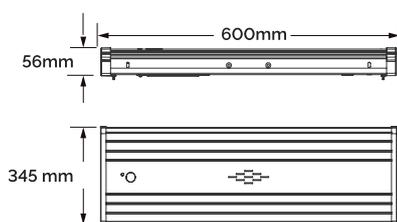
This product is not suitable for use on highly flammable surfaces (e.g. polystyrene, textiles).

SPECIFICATION & DIMENSIONS

Code: R141400

Power Supply: 220-240V

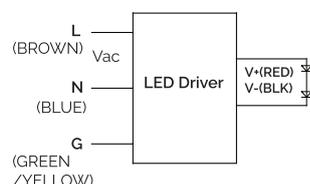
Power Factor: >0.95



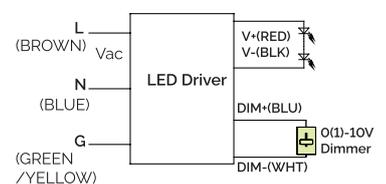
ELECTRICAL DIAGRAM

 Some models may come with a 0(1)-10V dimmable driver

Non Dimmable Driver



0(1)-10V Dimmable Driver


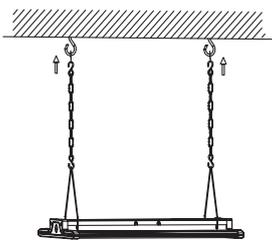
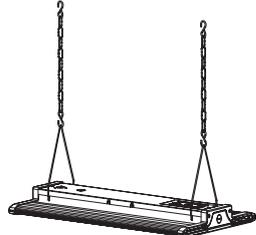


Thanos LED Multibay



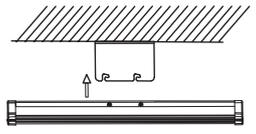
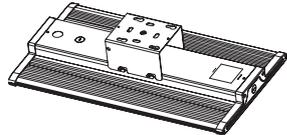
INSTALLATION STEPS

Before following these steps please ensure you have read and adhered to the guidelines and information overleaf. Remove the product from the box and inspect it for any damage. If the luminaire is in a good condition, proceed with the installation. Make sure you have all the necessary installation accessories.



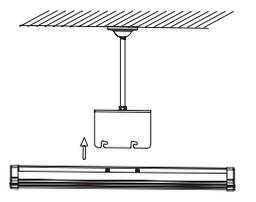
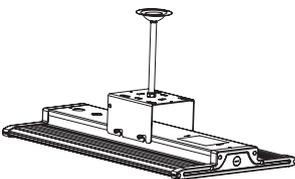
SUSPENDED

<p>STEP 1</p>  <p>Use the accessories: Suspending hook (x2) Suspending chain (x2)</p>	<p>STEP 2</p>  <p>Connect the hook to the chain and hook into the holes at the back of the luminaire.</p>	<p>STEP 3</p>  <p>Hang the chain from the suspending hook.</p>	<p>INSTALLATION COMPLETE</p> 
---	---	---	---

CEILING MOUNTING

<p>STEP 1</p>  <p>Use the accessories: Bracket (x1) Screws (x4)</p>	<p>STEP 2</p>  <p>Fix the bracket on the ceiling using the 4 screws.</p>	<p>STEP 3</p>  <p>Slide the luminaire on the bracket and secure the screws.</p>	<p>INSTALLATION COMPLETE</p> 
---	--	--	---

CIRCULAR PIPE MOUNTING

<p>STEP 1</p>  <p>Use the accessories: Bracket (x1), Ceiling base (x1) Circular pipe (x1) Gasket (x1), Spring gasket (x1) Nut (x2), Screw (x3)</p>	<p>STEP 2</p>  <p>Fix the base on the ceiling. Screw the circular pipe on the ceiling base and then screw the nut on the circular pipe.</p>	<p>STEP 3</p>  <p>Place the bracket on the circular pipe and fix using the gasket, spring gasket and nuts. Slide the luminaire on the bracket and secure the screws.</p>	<p>INSTALLATION COMPLETE</p> 
--	---	---	---



DISPOSAL OF ELECTRONIC EQUIPMENT WEEE DIRECTIVE 2002/96/EC

This product falls within the scope of the Waste Electrical & Electronic Equipment Directive (WEEE), which means the product should not be disposed of as normal household waste. Ensure that this luminaire and lamp is disposed of in accordance with the WEEE Directive. Contact a local Council Waste Dept. Local Amenity Site, or the Environment Agency for further information. RoHS - All components and materials used in this product are RoHS 2002/95/EC compliant.



WARRANTY

This product is in warranty in the UK for a period of **5 year** from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.